

# Automation Platform notion.ABC



## notion.ABC



### The new platform for automation

Three basic designs are integrated into a wide variety of configurations. "notion.A" are completely enclosed units. They are mounted by means of a supporting arm and enable system visualization and operation under the most difficult ambient conditions. The modern 16:9 aspect ratio displays its advantages to the full in upright portrait orientation: visualization at the top, with status displays, trend diagrams and softkeys at the bottom. But even in landscape orientation, the larger display helps to make the multi-touch navigation







really ergonomical. As a switch cabinet computer, "notion.B" offers the necessary processing power. For traditional installation in 19-inch control panels, switch cabinets or consoles, "notion.C" combines the IP65 tight front unit of "notion.A" with the processing power of "notion.B". "notion.ABC" is the innovative foundation for both future-oriented and traditional operating system and automation applications.

---

### Content







|                           |     |
|---------------------------|-----|
| Products.....             | 449 |
| Dimensional Drawings..... | 457 |

## notion.A (tablet)

|  |  |  |  |
|--|--|--|--|
| Produkt                                  | notion.A (Tablet)  | notion.A (Tablet)  | notion.A (Tablet)  |
|  |                 |                |               |
| screen diagonal                          | 256.0 mm (10.1")   | 439.4 mm (17.3")   | 469.9 mm (18.5")   |
| screen resolution                        | 1280×800   | 1920×1080  | 1366×768   |
| screen format                            | 16:9 Wide XGA  | 16:9 Full HD   | 16:9 Wide XGA  |
| touch screen                             | Glass touch (Multitouch)   | Glass touch (Multitouch)   | Glass touch (Multitouch)   |
| operating voltage                        | 24 VDC; +/- 20%  | 24 VDC; +/- 20%  | 24 VDC; +/- 20%  |
| operating Temperature                    | 0...50 °C  | 0...50 °C  | 0...50 °C  |
| type of protection front / backside (IP) | IP65 / IP65  | IP65 / IP65  | IP65 / IP65  |
| case mounting                            | VESA 75 / 100  | VESA 75 / 100  | VESA 75 / 100  |
| cpu                                      | ARM Cortex   | ARM Cortex   | ARM Cortex   |
| drive                                    | SD (Secure Digital Memory Card)  | SD (Secure Digital Memory Card)  | SD (Secure Digital Memory Card)  |
| operating system                         | Android  | Android  | Android  |
| interface                                | <b>LAN</b> <b>USB 2.0</b>  | <b>LAN</b> <b>USB 2.0</b>  | <b>LAN</b> <b>USB 2.0</b>  |
| Weblink                                  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a> | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a> | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a> |
| QR-Code                                  |               |               |             |









Can't find the right variant? Please contact us ([info@tr-electronic.de](mailto:info@tr-electronic.de))

notion.A (tablet)  
notion.A (Computer)

|  |  |   |   |  |
|--|--|---|---|--|
| Produkt                                  | notion.A (Tablet)<br> | notion.A (Computer)<br>   | notion.A (Computer)<br>  |  |
| screen diagonal                          | 609.6 mm (24.0")   | 256.0 mm (10.1")  | 439.4 mm (17.3")  |  |
| screen resolution                        | 1920 x 1080  | 1280 x 800  | 1920 x 1080   |  |
| screen format                            | 16:9 Full HD   | 16:9 Wide XGA   | 16:9 Full HD  |  |
| touch screen                             | Glass touch (Multitouch)   | Glass touch (Multitouch)  | Glass touch (Multitouch)  |  |
| operating voltage                        | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   | 24 VDC; +/- 20%   |  |
| operating Temperature                    | 0...50 °C  | 0...50 °C   | 0...50 °C   |  |
| type of protection front / backside (IP) | IP65 / IP65  | IP65 / IP54   | IP65 / IP54   |  |
| case mounting                            | VESA 75 / 100  | VESA 75 / 100   | VESA 75 / 100   |  |
| cpu                                      | ARM Cortex   | Intel® Atom™ Quad-Core  | Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7  |  |
| drive                                    | SD (Secure Digital Memory Card)  | CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) | CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) |  |
| operating system                         | Android  | Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                      | Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                      |  |
| interface                                | <b>LAN</b> <b>USB 2.0</b>  | <b>LAN</b> <b>RS232</b><br><br><b>WLAN</b> <b>Bluetooth</b><br><br><b>USB 2.0</b> <b>Realtime -LAN</b><br><br><b>USB 3.0</b>                              | <b>LAN</b> <b>RS232</b><br><br><b>WLAN</b> <b>Bluetooth</b><br><br><b>USB 2.0</b> <b>Realtime -LAN</b><br><br><b>USB 3.0</b>                              |  |
| Weblink                                  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a>       | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/TRS-DOC-000817</a>  |  |
| QR-Code                                  |                     |    |    |  |


# notion.A (Computer)

## notion.A (Terminal)

| notion.A (Computer)  | notion.A (Computer)  | notion.A (Terminal)   | notion.A (Terminal)   |
|--|--|---|---|
|   |   |                     |                    |
| 469.9 mm (18.5")   | 609.6 mm (24.0")   | 256.0 mm (10.1")  | 439.4 mm (17.3")  |
| 1366 × 768   | 1920 × 1080  | 1280 × 800  | 1920 × 1080   |
| 16:9 Wide XGA  | 16:9 Full HD   | 16:9 Wide XGA   | 16:9 Full HD  |
| Glass touch (Multitouch)   | Glass touch (Multitouch)   | Glass touch (Multitouch)  | Glass touch (Multitouch)  |
| 24 VDC; +/- 20%  | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   | 24 VDC; +/- 20%   |
| 0...50 °C  | 0...50 °C  | 0...50 °C   | 0...50 °C   |
| IP65 / IP54  | IP65 / IP54  | IP65 / IP65   | IP65 / IP65   |
| VESA 75 / 100  | VESA 75 / 100  | VESA 75 / 100   | VESA 75 / 100   |
| Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7   | Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7   |   |   |
| CFast (CompactFlash<br>ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) | CFast (CompactFlash<br>ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) |   |   |
| Windows® Embedded Standard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional  | Windows® Embedded Standard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional  |   |   |
| <b>LAN</b> <b>RS232</b>  | <b>LAN</b> <b>RS232</b>  | <b>VGA</b> <b>DVI</b>   | <b>VGA</b> <b>DVI</b>   |
| <b>WLAN</b> <b>Bluetooth</b>   | <b>WLAN</b> <b>Bluetooth</b>   |   |   |
| <b>USB 2.0</b> <b>Realtime<br/>-LAN</b>  | <b>USB 2.0</b> <b>Realtime<br/>-LAN</b>  |   |   |
| <b>USB 3.0</b>   | <b>USB 3.0</b>   |   |   |
| <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a> | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a> |
|   |   |                    |                  |








# notion.A (Terminal)

## notion.B 100

|  |  |   |   |  |
|--|--|---|---|--|
| Produkt                                  | notion.A (Terminal)<br> | notion.A (Terminal)<br> | notion.B 100<br>                     |  |
| screen diagonal                          | 469.9 mm (18.5")   | 609.6 mm (24.0")  |   |  |
| screen resolution                        | 1366x768   | 1920x1080   |   |  |
| screen format                            | 16:9 Wide XGA  | 16:9 Full HD  |   |  |
| touch screen                             | Glass touch (Multitouch)   | Glass touch (Multitouch)  | Keyboard, mouse   |  |
| operating voltage                        | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   | 24 VDC; +/- 20%   |  |
| operating Temperature                    | 0...50 °C  | 0...50 °C   | 0...50 °C   |  |
| type of protection front / backside (IP) | IP65 / IP65  | IP65 / IP65   | IP20  |  |
| case mounting                            | VESA 75 / 100  | VESA 75 / 100   | Mounting bracket  |  |
| cpu                                      |  |   | AMD Quad Core EX-420 CA SoC   |  |
| drive                                    |  |   | CF (Compact Flash);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive)  |  |
| operating system                         |  |   | Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8<br>Standard;<br>Windows® 8 Professional |  |
| interface                                | <b>VGA</b> <b>DVI</b>  | <b>VGA</b> <b>DVI</b>   | <b>LAN</b> <b>USB 2.0</b>   |  |
| Weblink                                  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a>    | <a href="http://www.tr-electronic.de/f/TRS-DOC-000817">www.tr-electronic.de/f/<br/>TRS-DOC-000817</a>     | <a href="http://www.tr-electronic.de/f/TRS-DOC-000818">www.tr-electronic.de/f/<br/>TRS-DOC-000818</a>                   |  |
| QR-Code                                  |                       |                        |                                    |  |







# notion. B 200

## notion.C (Tablet)

|   |  |   |  |
|---|--|---|--|
| <p>notion. B 200</p>   | <p>notion.C (Tablet)</p>  | <p>notion.C (Tablet)</p>  | <p>notion.C (Tablet)</p>  |
|   | 256.5 mm (10.1 ")  | 439.4 mm (17.3")  | 469.9 mm (18.5")   |
|   | 1280 x 800   | 1920 x 1080   | 1366 x 768   |
|   | 16:9 Wide XGA  | 16:9 Full HD  | 16:9 Wide XGA  |
| Keyboard, mouse   | Glass touch (Multitouch)   | Glass touch (Multitouch)  | Glass touch (Multitouch)   |
| 24 VDC; +/- 20%   | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   | 24 VDC; +/- 20%  |
| 0...50 °C   | 0...50 °C  | 0...50 °C   | 0...50 °C  |
| IP20  | IP65 / IP20  | IP65 / IP20   | IP65 / IP20  |
| Mounting bracket:<br>DIN rail   | Recessed mounting  | Recessed mounting   | Recessed mounting  |
| Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7  | ARM Cortex   | ARM Cortex  | ARM Cortex   |
| CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) | SD (Secure Digital Memory Card)  | SD (Secure Digital Memory Card)   | SD (Secure Digital Memory Card)  |
| Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                      | Android  | Android   | Android  |
| <b>LAN</b> <b>RS232</b>   | <b>LAN</b> <b>USB 2.0</b>  | <b>LAN</b> <b>USB 2.0</b>   | <b>LAN</b> <b>USB 2.0</b>  |
| <b>WLAN</b> <b>Bluetooth</b>  |  |   |  |
| <b>USB 2.0</b> <b>Realtime</b>  |  |   |  |
| <b>USB 3.0</b> <b>-LAN</b>  |  |   |  |
| <a href="http://www.tr-electronic.de/f/TRS-DOC-000873">www.tr-electronic.de/f/TRS-DOC-000873</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>           | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>            | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>             |
|   |                         |                          |                         |

# notion.C (Tablet)









# notion.C (Computer)

|  |  |   |   |  |
|--|--|---|---|--|
| Produkt                                  | notion.C (Tablet)  | notion.C (Computer)   | notion.C (Computer)   |  |
|  |                 |   |    |  |
| screen diagonal                          | 609.6 mm (24.0")   | 256.5 mm (10.1 ")   | 439.4 mm (17.3")  |  |
| screen resolution                        | 1920 x 1080  | 1280 x 800  | 1920 x 1080   |  |
| screen format                            | 16:9 Full HD   | 16:9 Wide XGA   | 16:9 Full HD  |  |
| touch screen                             | Glass touch (Multitouch)   | Glass touch (Multitouch)  | Glass touch (Multitouch)  |  |
| operating voltage                        | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   | 24 VDC; +/- 20%   |  |
| operating Temperature                    | 0...50 °C  | 0...50 °C   | 0...50 °C   |  |
| type of protection front / backside (IP) | IP65 / IP20  | IP65 / IP20   | IP65 / IP20   |  |
| case mounting                            | Recessed mounting  | Recessed mounting   | Recessed mounting   |  |
| cpu                                      | ARM Cortex   | Intel® Atom™ Quad-Core  | Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7  |  |
| drive                                    | SD (Secure Digital Memory Card);   | CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) | CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) |  |
| operating system                         | Android  | Windows® Embedded Standard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                     | Windows® Embedded Standard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                     |  |
| interface                                | <b>LAN</b> <b>USB 2.0</b>  | <b>LAN</b> <b>RS232</b><br><br><b>WLAN</b> <b>Bluetooth</b><br><br><b>USB 2.0</b> <b>Realtime-LAN</b><br><br><b>USB 3.0</b>                               | <b>LAN</b> <b>RS232</b><br><br><b>WLAN</b> <b>Bluetooth</b><br><br><b>USB 2.0</b> <b>Realtime-LAN</b><br><br><b>USB 3.0</b>                               |  |
| Weblink                                  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a> | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>  |  |
| QR-Code                                  |               |    |    |  |







# notion.C (Computer)

## notion.C (Terminal)

|   |   |  |  |
|---|---|--|--|
| notion.C (Computer)   | notion.C (Computer)   | notion.C (Terminal)  | notion.C (Terminal)  |
|    |    |                |               |
| 469.9 mm (18.5")  | 609.6 mm (24.0")  | 256.5 mm (10.1 ")  | 439.4 mm (17.3")   |
| 1366 × 768  | 1920 × 1080   | 1280 × 800   | 1920 × 1080  |
| 16:9 Wide XGA   | 16:9 Full HD  | 16:9 Wide XGA  | 16:9 Full HD   |
| Glass touch (Multitouch)  | Glass touch (Multitouch)  | Glass touch (Multitouch)   | Glass touch (Multitouch)   |
| 24 VDC; +/- 20%   | 24 VDC; +/- 20%   | 24 VDC; +/- 20%  | 24 VDC; +/- 20%  |
| 0...50 °C   | 0...50 °C   | 0...50 °C  | 0...50 °C  |
| IP65 / IP20   | IP65 / IP20   | IP65 / IP20  | IP65 / IP20  |
| Recessed mounting   | Recessed mounting   | Recessed mounting  | Recessed mounting  |
| Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7  | Intel® Atom™ Quad-Core;<br>AMD Quad Core;<br>Intel® Core™ i5;<br>Intel® Core™ i7  |  |  |
| CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) | CFast (CompactFlash ATA Serial Transfer);<br>CF (Compact Flash);<br>SD (Secure Digital Memory Card);<br>SSD (Solid-State-Drive);<br>HDD (Hard-Disk-Drive) |  |  |
| Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                      | Windows® Embedded Stadard 7;<br>Windows® 7 Professional;<br>Windows® Embedded 8 Standard;<br>Windows® 8 Professional                                      |  |  |
| <b>LAN</b> <b>RS232</b>   | <b>LAN</b> <b>RS232</b>   | <b>VGA</b> <b>DVI</b>  | <b>VGA</b> <b>DVI</b>  |
| <b>WLAN</b> <b>Bluetooth</b>  | <b>WLAN</b> <b>Bluetooth</b>  |  |  |
| <b>USB 2.0</b> <b>Realtime -LAN</b>   | <b>USB 2.0</b> <b>Realtime -LAN</b>   |  |  |
| <b>USB 3.0</b>  | <b>USB 3.0</b>  |  |  |
| <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a> | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a> |
|    |    |               |             |


## notion.C (Terminal)

|  |  |   |
|--|--|---|
| Produkt                                  | notion.C (Terminal)<br> | notion.C (Terminal)<br> |
| screen diagonal                          | 469.9 mm (18.5")   | 609.6 mm (24.0")  |
| screen resolution                        | 1366 x 768   | 1920 x 1080   |
| screen format                            | 16:9 Wide XGA  | 16:9 Full HD  |
| touch screen                             | Glass touch (Multitouch)   | Glass touch (Multitouch)  |
| operating voltage                        | 24 VDC; +/- 20%  | 24 VDC; +/- 20%   |
| operating Temperature                    | 0...50 °C  | 0...50 °C   |
| type of protection front / backside (IP) | IP65 / IP20  | IP65 / IP20   |
| case mounting                            | Recessed mounting  | Recessed mounting   |
| cpu                                      |  |   |
| drive                                    |  |   |
| operating system                         |  |   |
| interface                                | <b>VGA</b> <b>DVI</b>  | <b>VGA</b> <b>DVI</b>   |
| Weblink                                  | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>         | <a href="http://www.tr-electronic.de/f/TRS-DOC-000819">www.tr-electronic.de/f/TRS-DOC-000819</a>          |
| QR-Code                                  |                       |                        |

Can't find the right variant? Please contact us (info@tr-electronic.de)

# Dimensional Drawings

**notion.A (Tablet)**  
Dimensions see table

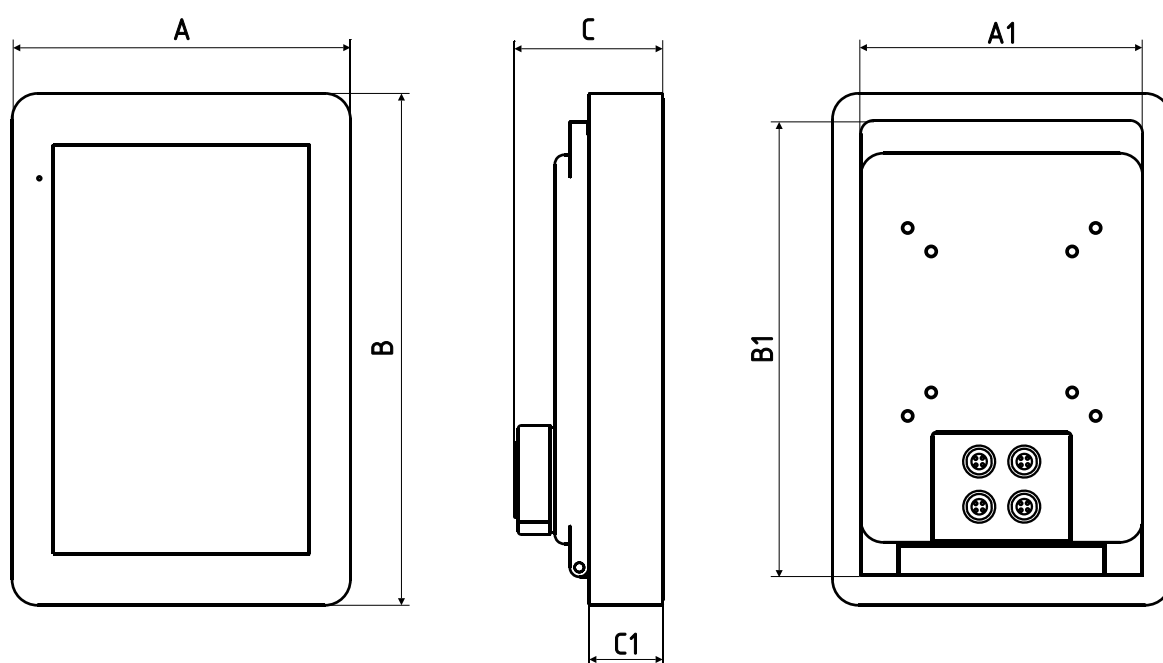

**notion.A**  
Dimensions

| Displaydiagonale [mm] | A     | A1    | B     | B1    | C    | C1   |
|-----------------------|-------|-------|-------|-------|------|------|
| 10,1 inch             | 180,0 | 150,0 | 272,3 | 242,0 | 78,9 | 39,0 |
| 17,3 inch             | 266,2 | 150,0 | 433,3 | 242,0 | 83,5 | 41,0 |
| 18,5 inch             | 289,6 | 150,0 | 460,5 | 242,0 | 85,5 | 41,0 |
| 24,0 inch             | 357,5 | 150,0 | 594,7 | 242,0 | 85,0 | 42,5 |

# Dimensional Drawings

**notion.B**  
Dimensions

Montagevarianten

X ( 2,5 : 1 )

| [mm] | A     | A1    | A2   | A3   | B    | B1   | B2       | C     | C1    | C2  |
|------|-------|-------|------|------|------|------|----------|-------|-------|-----|
|      | 199,0 | 143,0 | 28,3 | 18,5 | 70,5 | 63,5 | 44,5±0,2 | 133,0 | 127,0 | 6,0 |

| [mm] | B3  | A4   | ØX  |
|------|-----|------|-----|
|      | 4,5 | 14,0 | 9,0 |

**notion.B**  
DIN-rail mounted

**notion.B**  
Attached with bracket


A (1:1)

Illustrations are schematic diagrams. Binding dimension drawings and CAD data for specific order numbers at [www.tr-electronic.com](http://www.tr-electronic.com) or on request.

# Dimensional Drawings

## notion.C

Dimensions see table

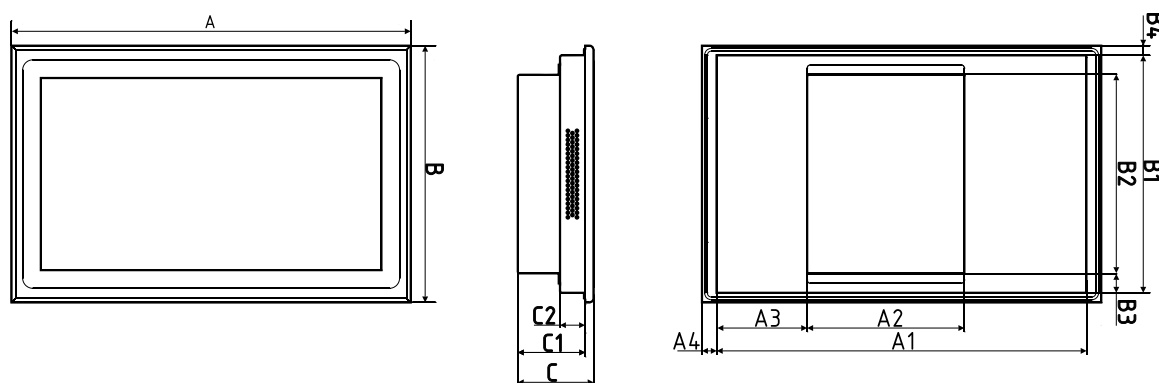

## notion.C

Dimensions

| Displaydiagonale [mm] | A     | A1    | A2    | A3    | A4   | B     | B1    | B2    | B3   | B4   | C    | C1   | C2   |
|-----------------------|-------|-------|-------|-------|------|-------|-------|-------|------|------|------|------|------|
| 7,0 inch              | 201,1 | 189,1 | 185,7 | 1,7   | 6,0  | 126,4 | 114,4 | 86,0  | 26,7 | 6,0  | 39,7 | 36,7 | 11,7 |
| 10,1 inch             |       |       |       |       |      |       |       |       |      |      |      |      |      |
| 17,3 inch             |       |       |       |       |      |       |       |       |      |      |      |      |      |
| 18,5 inch             | 482,6 | 455,0 | 190,0 | 109,5 | 18,8 | 310,3 | 287,0 | 240,0 | 23,5 | 11,7 | 56,5 | 81,5 | 46,5 |
| 24,0 inch             |       |       |       |       |      |       |       |       |      |      |      |      |      |

---

# Headquarter

TR-Electronic GmbH  
Eglishalde 6

D-78647 Trossingen  
Germany

Tel.: +49/7425 228-0  
Fax: +49/7425 228-33

info@tr-electronic.de  
www.tr-electronic.de

---

## International

### Argentina

AEA Aparatos Eléctricos  
Automáticos  
S.A.C.I.E./Asunción 2130  
AR-1419 Buenos Aires  
Tel.: +54/11 - 4574 1155  
Fax: +54/11 - 4574 2400  
servicioalcliente@aea.com.ar  
www.aea.com.ar

### Brazil

Grupo C+ Tecnologia  
Rua dos Caetés  
601 - Perdizes  
BR - São Paulo – SP  
CEP-05016-081  
Tel.: +55/11-2168 6554  
Fax: +55/11-2168 6555  
info@ctecnologia.com.br  
www.ctecnologia.com.br

### Denmark

TR-Electronic Danmark ApS  
Hustedgårdvej 22  
DK-8722 Hedensted  
Tel.: +45/75 89 06 03  
Fax: +45/75 89 06 36  
cbj@tr-electronic.dk  
www.tr-electronic.dk

### India

Global-Tech (India) Pvt Ltd  
404 White House  
1482 Sadashiv Peth  
IND-Tilak Road, Pune - 411 030  
Tel.: +91/20- 2447 00 85  
Fax: +91/20- 2447 00 86  
info@globaltechindia.com  
www.globaltechindia.com

### Australia

Sensor Measurement Pty Ltd.  
Unit 8/26 Shields Crescent  
P.O. Box 1079  
AU-Booragoon  
Western Australia 6154  
Tel.: +61/8-93 17 25 52  
Fax: +61/8-93 17 24 52  
sales  
@sensormeasurement.com.au  
www.sensormeasurement.com.au

### Canada

TR Electronic  
P.O. Box 2543, Station B  
CDN-London, Ontario Canada  
N6A 4G9  
Tel.: +1/519-452 1999  
Fax: +1/519-452 1177  
customercare@trelectronic.com  
www.trelectronic.com

### Finland

Sarlin Oy Ab  
P.O. Box 750  
FI-00101 Helsinki  
Tel.: +358/10 - 550 4000  
Fax: +358/10 - 550 4201  
info@sarlin.com  
www.sarlin.com

### Israel

Dor Engineering  
P.O.Box 6  
ISR-4880500 Kibutz Einat  
Tel.: +972/3 9007595  
Fax: +972/3 9007599  
info@doreng.co.il  
www.doreng.co.il

### Austria

TR-Electronic GmbH  
Tragösserstraße 117  
A-8600 Bruck/Mur  
Tel.: +43/3862–55006 0  
Fax: +43/3862–55006 33  
info@tr-electronic.at  
www.tr-electronic.at

### China

TR-Electronic (Beijing) CO., LTD.  
Rm. 1302, Side A, Lucky Tower  
No. 3 Dongsanhuan North Road  
Chaoyang District  
CN-100027 Beijing, P.R. China  
Tel.: +86/10 - 646 131 96  
Fax: +86/10 - 646 135 51  
lu.yu@tr-electronic.de  
www.tr-electronic.com.cn

### France

TR-Electronic France SARL  
1 Av. Christian Doppler  
Bâtiment 2  
F-77700 Serris  
Tel.: +33/1-64 63 68 68  
Fax: +33/1-61 10 17 66  
info@tr-electronic.fr  
www.tr-electronic.fr

### Italy

Telestar S.r.l.  
Via Novara, 35  
I-28010 Vaprio D'Agogna (NO)  
Tel.: +39/03-21 966 768  
Fax: +39/03-21 996 281  
telestar@telestar-automation.it  
www.telestar-automation.it

### Belgium

Martek SPRL - BVBA  
Avenue René Comhaire 82  
BE-1082 Bruxelles  
Tel.: +32/24 67 00 40  
Fax: +32/24 67 00 49  
info@martek.be  
www.martek.be

### Czech Republic, Slovakia

DEL a.s.  
Strojírenská 38  
CZ-59101 Žďár nad Sázavou  
Tel.: +420/566 657 100  
Fax: +420/566 621 657  
zastoupeni.tr@del.cz  
www.del.cz

### Great Britain

TR-Electronic Limited  
4 William House, Old St.  
Michaels Drive, Braintree  
GB-Essex CM7 2AA  
Tel.: +44/1 371-876 187  
Fax: +44/1 371-876 287  
info@tr-electronic.co.uk  
www.tr-electronic.co.uk

### Japan

SANTEST CO. LTD.  
1-60 Tsuneyoshi, 1-Chome  
Konohanaku  
J-Osaka 554-8691  
Tel.: +81/6-6465 5561  
Fax: +81/6-6465 5921  
info@santest.co.jp  
www.santest.co.jp

**Mexico**

TR Electronic  
P.O. Box 2543, Station B  
CDN-London, Ontario Canada  
N6A 4G9  
Tel.: +1/519-452 1999  
Fax: +1/519-452 1177  
customer@trelectronic.com  
www.trelectronic.com

**Russia**

Sensotek LLC  
Bolshoy Ovchinnikovskiy. per.16,  
off. 508  
RU-115184 Moscow  
Tel.: +7/495-797-12-54  
Fax: +7/495-797-12-24  
info@sensotek.ru  
www.sensotek.ru

**Sweden**

TR Electronic Sweden AB  
Djupdalsvägen 10  
S-192 51 Sollentuna  
Tel.: +46/8-756 72 20  
Fax: +46/8-756 76 80  
mailbox@trelectronic.se  
www.trelectronic.se

**USA (TR-Electronic)**

TR Electronic  
P.O. Box 4448  
US-Troy, MI 48099  
Tel.: +1/248-244-2280  
Fax: +1/248-244-2283  
customer@trelectronic.com  
www.trelectronic.com

**Netherlands**

TR-Electronic Nederland BV  
Postbus 1682  
NL-6201 BR Maastricht  
Tel.: +31/43 352 3614  
Fax: +31/43 352 3555  
info@tr-electronic.nl  
www.tr-electronic.nl

**Singapore**

Globaltec Electronics  
(Far East) Pte. Ltd.  
50 Bukit Batok Street 23  
#06-27 Midview Building  
SIN-659578 Singapore  
Tel.: +65/6267 9188  
Fax: +65/6267 8011  
info@globaltec.com.sg  
www.globaltec.com.sg

**Switzerland**

TR-Electronic SA  
14, Ch. Pré-Fleuri  
CH-1228 Plan-les-Ouates/Genève  
Tel.: +41/22-7 94 21 50  
Fax: +41/22-7 94 21 71  
info@tr-electronic.ch  
www.tr-electronic.ch

**USA (TRsystems)**

TRS Fieldbus Systems, Inc.  
666 Baldwin Court  
US-Birmingham, MI 48009  
Tel.: +1/586 826-9696  
Fax: +1/586 826-9697  
support@trs-fieldbus.com  
www.trsystems.com  
trthailand@trelectronic.co.th  
www.trelectronic.co.th

**Norway**

TR Electronic Norway AS  
Fusdal Terrasse 3  
N-1387 Asker  
Tel.: +46 708 696 533  
Fax: +46 875 676 80  
info@trelectronic.no  
www.trelectronic.no

**Slovenia**

S.M.M. d.o.o.  
Jaskova 18  
SI-2001 Maribor  
Tel.: +386/2450 2300  
Fax: +386/2450 2302  
smm@siol.net  
www.smm.si

**Taiwan**

TR-Electronic (Beijing) CO., LTD.  
Rm. 1302, Side A, Lucky Tower  
No. 3 Dongsanhuan North Road  
Chaoyang District  
CN-100027 Beijing, P.R. China  
Tel.: +86/10 - 646 131 96  
Fax: +86/10 - 646 135 51  
lu.yu@tr-electronic.de  
www.tr-electronic.com.cn

**Poland**

Stoltronic-Polska Sp. z o.o.  
ul. Dabrowskiego 238C  
PL - 93-231 Lodz  
Tel.: +48/42-649 12 15  
Fax: +48/42-649 11 08  
stoltronic@stoltronic.pl  
www.stoltronic.pl

**South Africa**

Angstrom Engineering (Pty) Ltd.  
19 Tom Muller Road  
P.O. Box 793  
SA-Meyerton 1960  
Tel.: +27/16 3620300  
Fax: +27/16 3620725  
info@angstromeng.co.za  
www.angstromeng.co.za

**Thailand**

T+R Electronic (Thailand) Co., Ltd.  
120/62 Moo 8 Bang Sare  
TH - Sattahip, Chonburi 20250  
Tel.: +66/38 737 487  
Fax: +66/38 737 171  
trthailand@trelectronic.co.th  
www.trelectronic.co.th

**Republic of Korea**

MS Intech Co., Ltd.  
B-306, Gasan Digital 1 Ro 119  
Keumcheon-Gu  
KOR-Seoul  
Tel.: +82/2-334 0577  
Fax: +82/2-862 1591  
sales@msintech.com  
www.msintech.com

**Spain, Portugal**

Intertronic Internacional, SL  
C/Johannes Gutenberg, 4 y 6  
P.I. Parque Tecnológico  
E-46980 Valencia  
Tel.: +34/96-375 8050  
Fax: +34/96-375 1022  
info@intertronic.es  
www.intertronic.es


**Turkey**

ÜNİVERSA İÇ ve DİŞ TİC.  
MAK. SAN. LTD. ŞTİ.  
Cemal Gürsel Caddesi  
No: 11 D: 7  
TR-35600 Karsiyaka-İZMİR  
Tel.: +90/232 382 23 14  
Fax: +90/232 382 23 24  
info@universa.com.tr  
www.universa.com.tr

**TRsystems GmbH**  
Eglisshalde 16  
D - 78647 Trossingen

Tel. +49 7425 228-0  
Fax +49 7425 228-34

info@trsystems.de  
[www.trsystems.de](http://www.trsystems.de)



Last update: March 2015

TR-V-PR-GB-0009-01

Subject to technology and design modifications.

Cover photo background: ©kras99/fotolia